

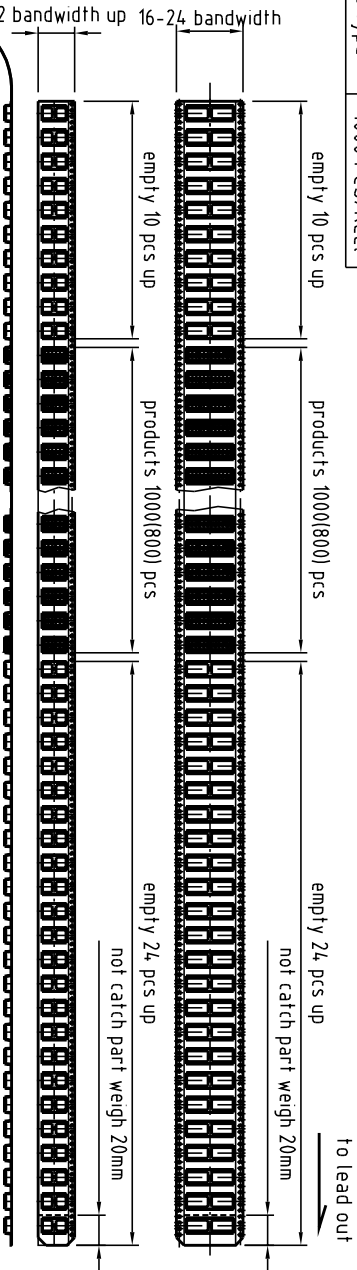
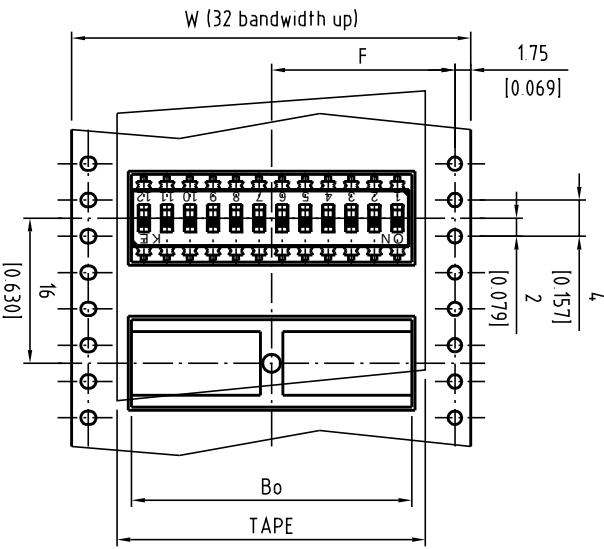


L type	800 PCS/Reel
S type	1000 PCS/Reel

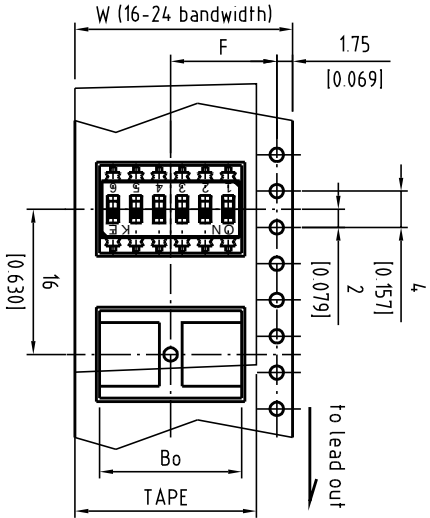

Specifications W	POP	Wo	Ao	Bo	Ko(L)	Ko(S)	F
16	1	16.5	9.65	2.94	5.2	4.2	7.5
	2	16.5	9.65	5.48	5.2	4.2	7.5
	3	16.5	9.65	8.02	5.2	4.2	7.5
24	4	24.5	9.65	10.56	5.2	4.35	11.5
	5	24.5	9.65	13.10	5.2	4.35	11.5
	6	24.5	9.65	15.64	5.2	4.35	11.5
32	7	32.5	9.65	18.18	5.2	4.35	14.2
	8	32.5	9.65	20.72	5.2	4.35	14.2
	9	44.5	9.65	23.26	5.2	4.35	20.2
44	10	44.5	9.65	25.80	5.2	4.35	20.2
	12	44.5	9.65	30.88	5.2	4.35	20.2

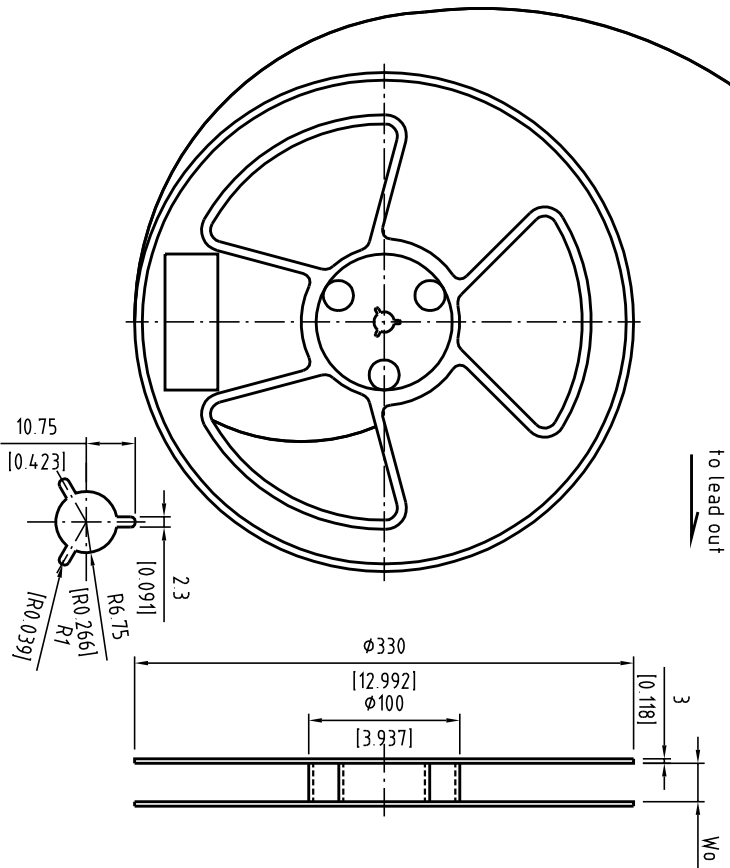

description	material	color	cope
Reel (HP9450)	PS	blue	resist static electricity

peel off point : edge catch the reverse 165°-180° to isolate
 peel off speed : 300mm/sec
 peel off strength : 0.2-0.7N (about 20-70gf)

總叔電子股份有限公司
 KINGTEK ELECTRONICS TECHNOLOGY CORP.

Drawing	Date	03/04/01
Design	Ratio	1:5
Check	Unit	mm
Approved		

Remark:

Product	DSIC Series
P/N	DSIC□□□□□□R
Drawing No.	DSP-DSICXXXXXXR-AP